




B A T O

BATOFIX TILE LEVELLING SYSTEMS

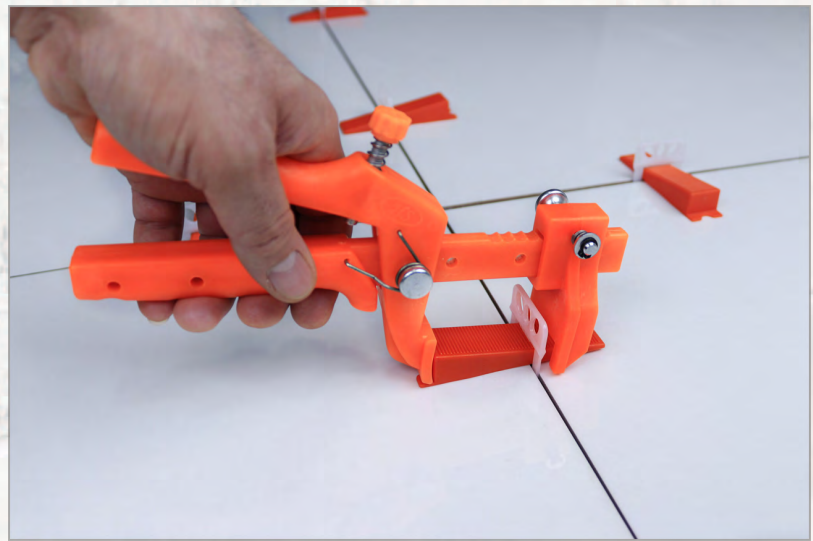

PRODUCT CATALOGUE

2024

www.batotrade.com



Reliable Products and Fast Service

BATOFIX TILE LEVELLING SYSTEM

A brief summary of the company and us:

We have been in the plastic and tile products industry for many years, conducting trade with over 70 countries and building valuable relationships with friends and customers in each one.

Throughout our journey, we have successfully developed and marketed dozens of products. As we achieved our goals and received feedback that exceeded all expectations, we decided to expand our product range to cater specifically to the construction and home renovation sectors, with a primary focus on tiling products.

Our company comprises dedicated individuals with 10 years of experience in the Plastic and Tile industry. We firmly believe that we have a lot to offer to the industry. We understand that methods may vary, and we continuously strive to learn, improve our work, and make tiling easier and more profitable on a daily basis.

Our company's growth can be attributed to our solid work ethic, commitment to delivering quality products, and friendly service.

Bato Trade Team



BATOFIX TILE LEVELLING SYSTEM

BATOFIX Tile Levelling System is an exciting new wedge driven product developed for laying wall and floor tiles.

During our research and development phase key factors in the design were bringing to the market a superior product that would create accurate surfaces efficiently while being cost effective, user friendly and doing away with expensive clamping tools.

The forefront of the BATOFIX design was expansion between the products being laid. BATOFIX Tile Levelling System when used leaves all joints completely free. When the wedge and clip are removed at the final stages of the process the breakpoint is located below the surface of the tiles being levelled, leaving the joints completely free for grouting or expansion as to European standards.

Features of the BATOFIX clip are:

- The base plate has a bevelled edge for easy placement between the tile and substrate. This bevel also collects adhesive in the adhesive grooves to maximize bond.
- The top of the clip has side lugs that are in place to disperse force for easy removal of the products.
- The clip is made from a durable material that during the installation process virtually eliminates accidental breakages.

BATOFIX Tile Levelling system was designed by a company with years of industry knowledge, and through rigorous research and testing has developed the best system on the market.

o *Batofix Clips*

3105	-	0.5mm
3110	-	1.0mm
3115	-	1.5mm
3120	-	2.0mm
3125	-	2.5mm
3130	-	3.0mm

For All Sizes Packing

Informations

100 pcs. x 20 packages
2000 pcs. per box
42 Boxes in one pallet
(Total 84.000pcs)

o *Batofix Wedges*



3301	-	Black
3302	-	Blue
3303	-	Orange

100pcs 20 packages =
1000 pcs. per box
42 Boxes in one pallet
(Total 42.000pcs)

o *Batofix H-20 Clips*

(For Thick Tiles and Marbles)

3210	-	1.0mm
3220	-	2.0mm
3230	-	3.0mm

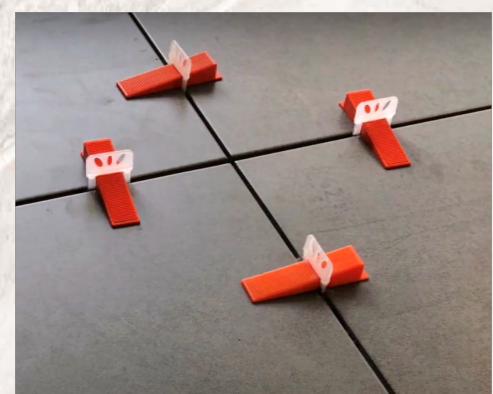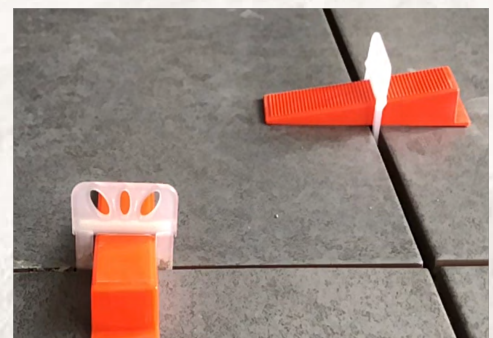



Reliable Products and Fast Service

TILE LEVELING SYSTEM

BATOFIX Tile levelling System is designed to create flawless tiling project efficiently every time.

BATOFIX allows you to set floor and wall tiles in a way that will hold the tiles unique without lippage until the adhesive dries. This process is extremely accurate and efficient at achieving a faultless surface.

For more information go to www.batotrade.com

ADVANTAGES

- Easily create a flawless finish
- Eliminated lippage
- Speeds up the installation process
- Locks in tiles preventing slump while drying
- Easy to remove
- Suitable for both professional tilers and home renovators

REQUIREMENT CHART

TILE SIZE	REQUIRED PER METRE
300mm x 300mm	= 44 clips and wedges
400mm x 400mm	= 25 clips and wedges
500mm x 500mm	= 16 clips and wedges
600mm x 600mm	= 11 clips and wedges

*clips and wedges are available in bags of 100.

HOW TO USE


STEP 1 - SETTING THE CLIPS



Spread your tile adhesive and lay the tile. Place the clips underneath the tile slightly back from the edge.

Keep the clip firmly against the tile as the clip acts as a 1.0mm spacer.


STEP 2 - TILE PLACEMENT



Set the adjacent tile firmly into the adhesive. Butt the tile against the clip giving the 1.0mm joint (if a larger joint is required spacers can be used, or set the required joint size).

Slide the BATOFIX wedges through the BATOFIX clips until they are firmly levelling both tiles.


STEP 3 - INSERT THE WEDGE



Using your thumb push the BATOFIX wedge with the right amount of pressure required to create the perfect finish.

Once the tiles are locked in position this is how they will stay until the adhesive sets. You can still slightly adjust the joint width while the adhesive is setting without disrupting the height of the tiles.

STEP 4 - REMOVE CLIPS



After the adhesive has set, you can remove the BATOFIX wedges and clips easily with a rubber mallet on the walls and by mallet or your foot on the floor.

Hit the BATOFIX clips on its side lug in the direction of the tile joint and the wedge and clip will dislodge from the tile at the breakpoint below the tile, leaving the joint free for grouting or silicone expansion.

TWIST STYLE TILE LIPPAGE SYSTEM




Twist Style Tile Lippage Control System

Achieving a flush surface from one tile to another has never been easier. With the Twist Lippage Control System, you can spin the leveling cap down with ease to the tile surface in seconds.

Other system might require tools, use of both hands or awkward repetitive motions when installing large format tile.

The Twist System uses a fast and precise free spin action that will accommodate most tile up to 1,2" (30mm).

The Batofix Tile Lippage System was designed to be used without any tools and simplifying the process of eliminating lippage between tiled surfaces.

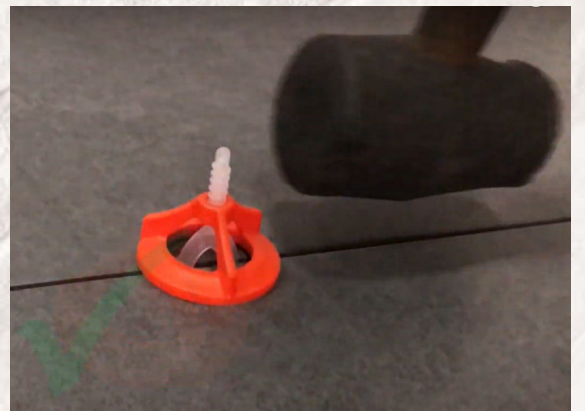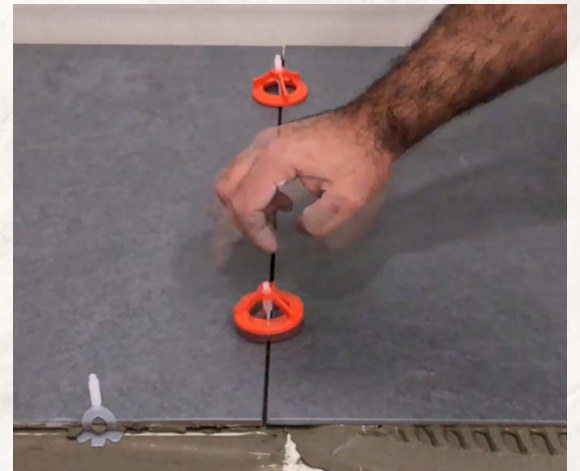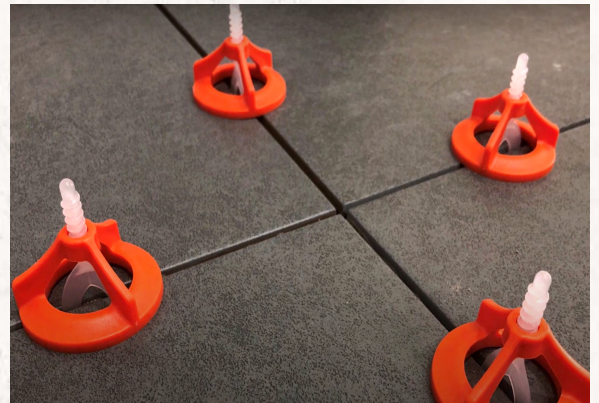

- | | |
|--|--|
| <ul style="list-style-type: none"> • <i>The Codes of Twist Clips</i> | <p><i>Clips Packing Information</i></p> |
| <ul style="list-style-type: none"> • <i>3510-1.0mm</i> <i>3515-1.5mm</i> <i>3520-2.0mm</i> <i>3525-2.5mm</i> <i>3530-3.0mm</i> <i>3600-NUT</i> | <p><i>100 pcs x 20 packages</i>
<i>2000 pcs. per box</i></p> <p><i>42 Boxes in one pallet</i>
<i>(Total 84 000pcs)</i></p> <p><i>Nut Packing Information</i></p> <p><i>100pcs x 20 packages</i>
<i>1000 pcs per box</i>
<i>42 Boxes in one pallet</i>
<i>(Total 42 000pcs)</i></p> |

BATOFIX TRACTION PLIERS

Batofix Traction Pliers are designed to be used with the Batofix Tile Lippage System.

The Batofix Tile Lippage System was designed to be used without any tools and simplifying the process of eliminating lippage between tiled surfaces.



We have introduced our line of traction pliers in both Metal and Plastic. Both pliers are adjustable to stop any over tensioning on the Batofix Clips.

The Metal Plier is the stronger of the two, easily helping force the wedge to bring the tiles to a lip free finish.

The Carbide Nylon Plastic Plier is a light weight option and has some flex so the installer can feel exactly how much tension they are applying to the clip and wedge. (With Spring ad usting Patented System)

The Batofix Traction Pliers are a very useful tool and made of great quality that you come to expect from Levtec Systems.

- *Trade Quality*
- *Help in the process of eliminating lippage*
- *2 styles Metal/Carbide Nylon plastic*
- *Built to last*
- *Plastic Traction Plier 3401*
- *Metal Traction Plier 3402*

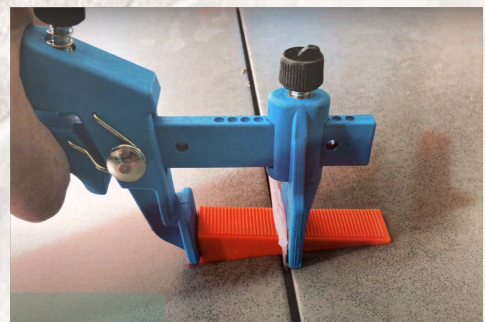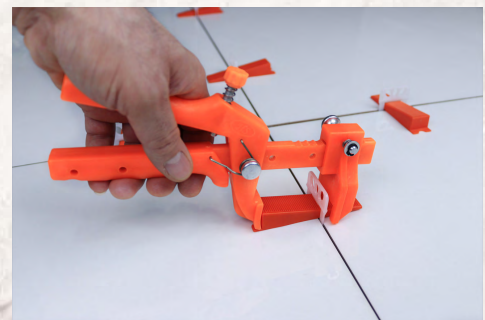

BATOFIX NOTCHED TROWELS

Batofix Notched Trowels are designed to last.

Made with a class leading 1mm thick polished steel blade to eliminate warping and notch wear when the trowels are used on harsh substrates such as cement screeds and concrete floors. This is also great for when tiles are being lifted for coverage you know there will be NO damage to a Batofix trowel.

Yellow coated footer to minimize adhesive build up makes this part of the trowel easier to clean in those areas than other trowels on the market.

Trowels have to be comfortable and the Batofix Notch Trowel with its ergonomic formed handle is especially easy on your hand.

- *Trade Quality*
- *Durable 1mm polished steel blade*
- *Ergonomic handle*
- *Built to last*

Sizes

- *4x4 30-50cm range*
- *6x6 30-50cm range*
- *8x8 30-50cm range*
- *10x10 30-50cm range*





B A T O

Reliable Ever

www.batotrade.com